

# 产品规格书

製品名	Lighting controller
品名	
品番	V01A426

受領印
御受領後、ご返却下さい

提出年月日 2021年3月18日

代表者 Matsumoto 責任者 叶小梵


潘多拉智能芯片（深圳）有限公司

广东省深圳市福田区新城大厦西座9楼  
TEL: 15999536000

# PRODUCT SPECIFICATION

V01A426 (1版)

## 1,Block Diagram

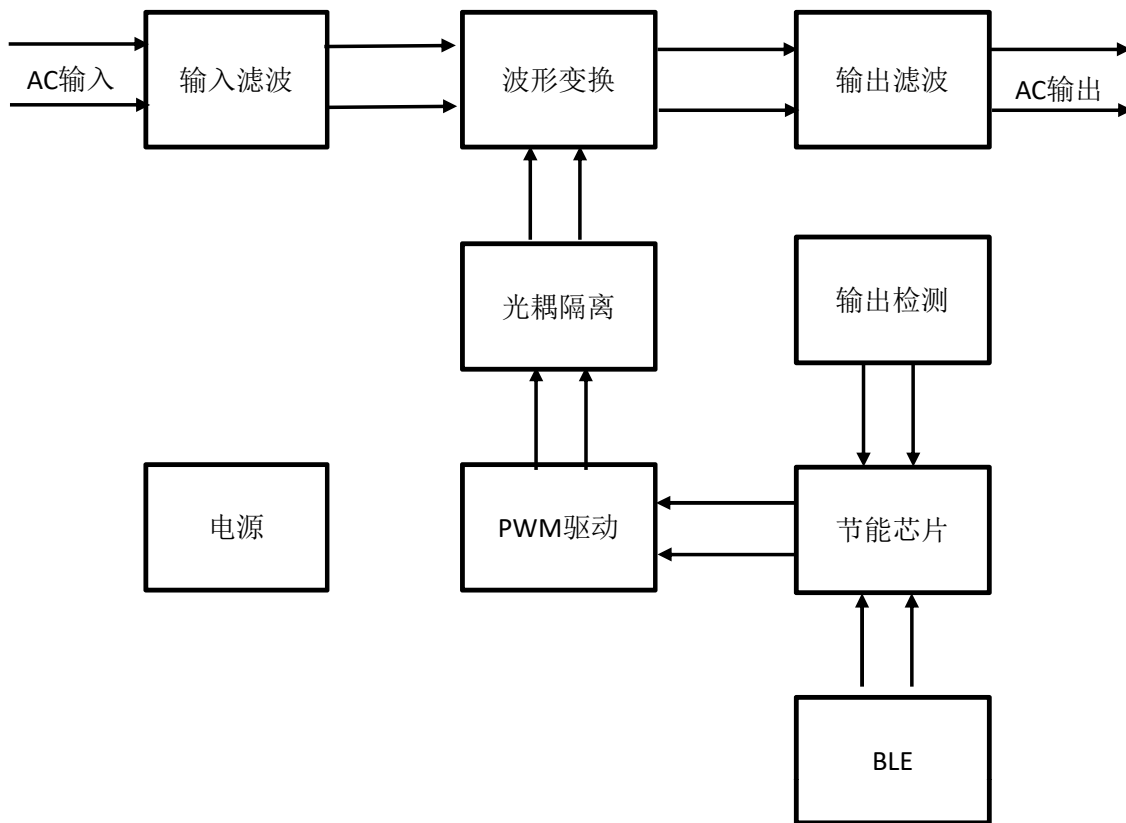

## 2.ABSOLUTE MAXIMUM RATING

### 2.1. Environmental Conditions

The normal operating environmental conditions are those as below.

Item	Symbol	Min	Typ	Max	Unit
Operating Environment	Hop	0	-	80	%RH
	Top	-20	-	40	°C
Storage Environment	Hstg	0		90	%RH
	Tstg	-10		50	°C

### 2-2.Electrical Conditions

Item	Condition	Min	Typ	Max	Unit
Input AC Votage	AC-DC SMPS	100	220	242	VAC
Input Frequency	-	50	-	60	Hz
Power Consumption	-	-	-	300	VA
Electrostatic discharge immunity test	Air	-	-	±8	kV
	Contact	-	-	±4	kV
Surge immunity test	Normal	IEC/JIS 61000-4-5			-
Isolation resistor test	-	DC500v/1min 100MΩ upper			-
Dielectric strength test	-	1.5kV/1min,1.8kV/1sec			-
Limits for harmonic current emissions	-	IEC/JIS 61000-3-2			-
Radiated, radio-frequency,electromagnetic field immunity test	-	IEC/JIS 61000-4-3			-
Electrical fast transient/burst immunity test	-	IEC/JIS 61000-4-4			-
immunity to conducted disturbances,induced by radio-frequency fields	-	IEC/JIS 61000-4-6			-
Voltage dips, short interruptions and voltage variations immunity tests	-	IEC/JIS 61000-4-11			-
Conducted Emissions	-	CISPR15			-
Radiated Emissions	-	EN55011, EN55022(CISPR11,22)			-
Distrbance Power	-	EN55013			-